

## APPLIKATOR 3000

For all your work up to 3 m long (5' x 10')

To watch a live demo about our Applikator table, scan the QR code or click on the link

<https://vimeo.com/504396584>



Applikator 2600 wooden table

### SIGNIFICANT EFFICIENCY GAIN AND TIME SAVING IN YOUR PRINT FINISHING OPERATIONS

- Lamination of any kind of adhesive material and mounting up to 65 mm (2 ½") thickness
- Working Width 168 cm (66"), Working length 311 cm – 122"
- Electrical motors as the source for controlling the roller's elevation motion and safety control by laser sensor
- Adjustable pressure from both ends of the gantry with 3 pre-set levels for precise pressure application
- Roller stays parallel to the table surface, wherever the media is positioned on the working surface
- Assembled on site within a few hours by one technician. The table will fit in any working environment, even with narrow access.
- Delivered with self levelling castors
- Choice of 2 work surfaces: wood as a base version or laminated glass for a smooth diffusion of backlighting. LED lighting system available as an option
- Antistatic, self-healing and phtalate free PVC mat, thickness of 4 mm, cut to the table size, included with the machine
- Adjustable height upon installation 85/95/105 cm (33 ½"/37 ½"/41")

# APPLIKATOR 3000

## —• OPTIONS

### SUPPLY OF ADHESIVE ROLLS


#### APPSUPAXE

Adhesive roll holder



#### APPFREIN

Adhesive roll holder on an aluminium self-blocking shaft. Delivered without shaft

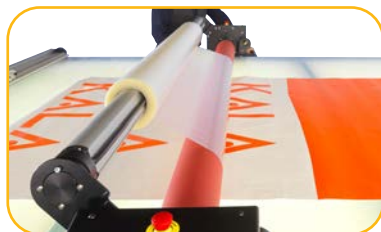

#### AX 1650

Self-blocking shaft in 165 cm – 65"



#### BA 1650 30

Scrolling bar



### STORING & CUTTING

#### STORING SYSTEM

For Applikator 3000, to be installed at the end of the table. Delivered without shaft




#### SHELF

Adaptable on the long or short edge of the table




#### CUTTING BAR ADAPTATION

Perfect for works in series. The cutting bar is easily removable from its location.

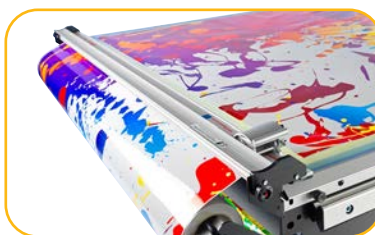

#### LED LIGHTING SYSTEM

Directly connected to the power supply of the machine. Improves accuracy for the most demanding jobs.

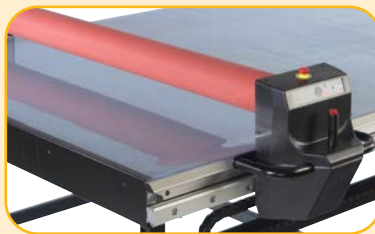

## —• TECHNICAL DATA

Maximum thickness	6,5 mm (2 ½")
Working width/Total width (cm – inch)	168 cm – 66' / 227 cm – 90"
Working length/Total length (cm – inch)	311 cm – 10' 3" / 352 cm – 11' 6"
Electricity	110 & 230 V, 50-60 Hz – 400 W with LED
Shipping dimensions	2 parcels: 360 x 72 x 80 cm & 233 x 72 x 75 cm (9' 6" x 2' 4" x 2' 8" & 7' 8" x 2' 4" x 2' 6")
Net Weight (kg – lb)	440 kg – 970 lb
Shipping weight (kg – lb)	about 550 kg - 1212 lb depending on the configuration
Warranty	2 years
Made in France, CE certified, based on European Machines Directives and electromagnetic compatibility CEM & FCC	

See our total range of products on our web site [www.kala.systems](http://www.kala.systems)

[www.kala.systems](http://www.kala.systems)

**KALA**

**kolor** online



CE  
**RoHS**

## APPLIKATOR MODULAR



Flexibility  
in sizes for all  
your finishing  
work without  
a limit

To watch a live  
demo about  
our Applikator  
table, scan the  
QR code or click  
on the link

Applikator 4400 with LED kit

<https://vimeo.com/504396584>



### SIGNIFICANT EFFICIENCY GAIN AND TIME SAVING IN YOUR ADHESIVE MEDIA APPLICATIONS

- Lamination of any kind of adhesive material and mounting up to 65 mm (2 ½") thickness
- Working width 170 cm (67")
- Modular system: base model of 2,05 m – 6' 9" expandable by sections of 2,38 m - 7' 10". Chose your size upon order or have it expanded later.
- Electrical motors as the source for controlling the roller's elevation motion and safety control by laser sensor
- Adjustable pressure from both ends of the gantry with 3 pre-set levels for precise pressure application
- Roller stays parallel to the table surface, wherever the media is positionned on the working surface.
- Assembled on site within a few hours by one technician. The table will fit in any working environment, even with narrow access.
- Laminated glass for a smooth diffusion of backlighting. LED lighting system available as an option
- Antistatic, self-healing and phtalate free PVC mat, thickness of 4 mm, cut to the table size, included with the machine
- Adjustable height upon installation 80/90/100 cm – 31 ½"/35 ½" /39"

# APPLIKATOR MODULAR

## MODULAR AND EVOLUTIONARY SYSTEM

### EVOLUTIONARY APPLIKATOR – WIDTH: 1,70 M – 67”

This modular system is expandable by modules measuring 2,38 m – 7' 10" without limitations, either upon ordering or also field expandable.

Select the format that suits your needs today without wondering about future needs.

This lamination table can bring a lot of benefits to your operation and will match the evolution of your company.

Length: base module 2,38 m – 7' 10" expandable by the same size of 2,38 m – 7' 10".

Delivered with standard feet.

Use of castors is not suitable with the Grandé range.



Addition of a second gantry for simultaneous application on the same table

Working height can be adjusted upon installation at:  
80, 90 ou 100 cm  
(2' 7 ½", 2' 11 ½", 3' 3 ½")

Applikator in 9,2 m – 30' usable length with 2 gantries

# APPLIKATOR MODULAR

## CUSTOMIZE YOUR LAMINATION TABLE

Give your creative and finishing touch to your AppliKator table by customizing it with your brand logo or decorative design as illustrated in the image below.

Closing panels not supplied with the machine. Cutting drawings are available on demand.




## OPTIONS

### SUPPLY OF ADHESIVE ROLLS


#### APPSUPAXE

Adhesive roll holder

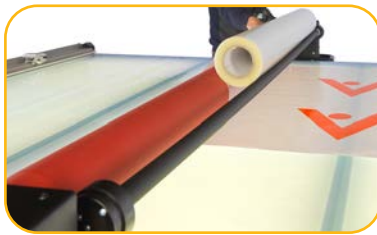

#### APPFREIN

Adhesive roll holder on an aluminium self-blocking shaft. Delivered without shaft

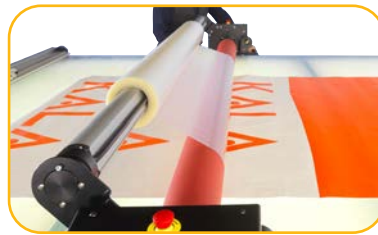

#### AX 1650

Self-blocking shaft in 165 – 65"



#### BA 1650 30

Scrolling bar



### STORING & CUTTING

#### STORING SYSTEM

To be installed at the end of the table. Delivered without shaft




#### SHELF

Adaptable on the long or short edge of the table



#### CUTTING BAR ADAPTATION 165 CM

Perfect for works in series. The cutting bar is easily removable from its location.

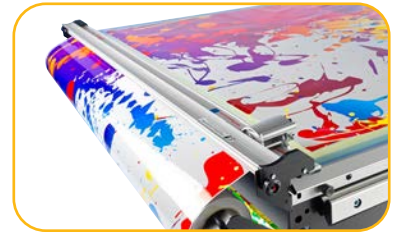

#### LED LIGHTING SYSTEM

Directly connected to the power supply of the machine. Improves accuracy for the most demanding jobs.



# APPLIKATOR MODULAR



Find more information about this machine and our product range at [www.kala.systems](http://www.kala.systems) or click on the link below

[General Documentation](#)

## — TECHNICAL DATA

	APP 2000	APP 4400	APP 6800	APP 9200
Usable length	208 cm – 6' 10"	445 cm – 14' 6"	683 cm – 22' 5"	921 cm – 30' 3"
Total length	238 cm – 7' 10"	476 cm – 15' 8"	714 cm – 23' 5"	952 cm – 31' 3"
Usable width	170 cm – 67"			
Total width	227 cm – 90"			
Height	Adjustable 80, 90, 100 cm (2 ft 7 1/2" – 2 ft 11 1/2" – 3 ft 3 1/2") upon installation			
Mounting thickness	6,5 cm – 2 1/2"			
Surface of the table	Glass panels			
Antistatic PVC mat	Thickness 4 mm			
Optional castors	Yes			No
Voltage	110 & 230 V - 50 / 60 Hz			
Power	400 W			
Weight without LED	300 kg – 660 lb	470 kg – 1040 lb	720 kg – 1590 lb	970 kg – 2140 lb
Shipping dimension without LED	2 Pallets 232 x 72 x 100 cm 93" x 28" x 39"	2 Pallets 232 x 72 x 100 cm 93" x 28" x 39"	3 Pallets (x2) = 232 x 130 x 100 cm 93" x 28" x 39"	3 Pallets (x2) = 232 x 130 x 100 cm 93" x 28" x 39"
W x D x H	232 x 72 x 75 cm 93" x 28" x 30"	232 x 72 x 130 cm 93" x 28" x 51"	(x1) = 232 x 130 x 75 cm 93" x 28" x 30"	(x1) = 232 x 130 x 130 cm 93" x 28" x 51"
Shipping weight without LED	400 kg – 882 lb	570 kg – 1250 lb	850 kg – 1875 lb	1150 kg - 2530 lb

